


ALPRO ZC 60 Zero Clearance

Technical Information

We offer the **Ladenko Alpro ZC 60** as a flush door design in a range of standard sizes (see table below). Added accessories include soft closer and the Jexis push to open button.

At a Glance:
 Max Door Weight: 55kg
 Max Door Width: 1020mm
 Max Door Height: 2340mm
 Min Door Thickness: 38mm
 Architrave Finish
 Square Set Finish
 P50 Shadow Line Finish
 90mm Stud

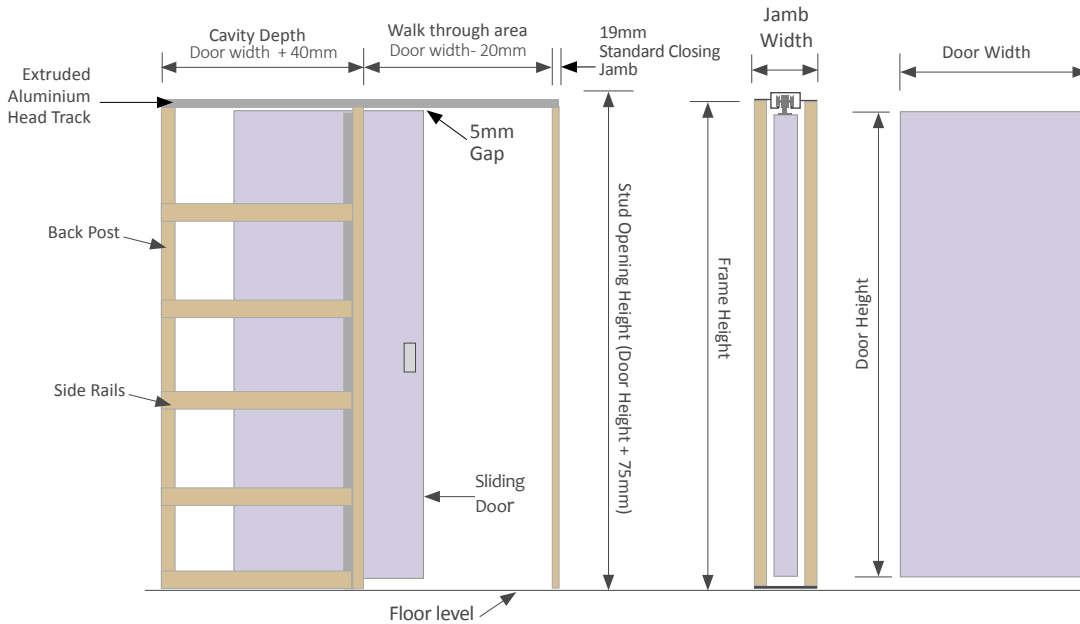

PLEASE NOTE
 Door leaf not included as part of the cavity sliding door pocket. Can be supplied separately.

Please Note: If your door weighs more than 55kg please see our **Classic Zero Clearance** range

Ladenko Standard Cavity Sliding Door Size and Stud Opening Data					
Door Size W x H	Single Stud Opening H x W	Double Stud Opening H x W	Door Size H x W	Single Stud Opening H x W	Double Stud Opening H x W
2040 x 520	2115 x 1100	2115 x 2140	2340 x 520	2415 x 1100	2415 x 2140
2040 x 620	2115 x 1300	2115 x 2540	2340 x 620	2415 x 1300	2415 x 2540
2040 x 720	2115 x 1500	2115 x 2940	2340 x 720	2415 x 1500	2415 x 2940
2040 x 770	2115 x 1600	2115 x 3140	2340 x 770	2415 x 1600	2415 x 3140
2040 x 820	2115 x 1700	2115 x 3340	2340 x 820	2415 x 1700	2415 x 3340
2040 x 870	2115 x 1800	2115 x 3540	2340 x 870	2415 x 1800	2415 x 3540
2040 x 920	2115 x 1900	2115 x 3740	2340 x 920	2415 x 1900	2415 x 3740
2040 x 1020	2115 x 2100	2115 x 4140	2340 x 1020	2415 x 2100	2415 x 4140

Features and Benefits of the Ladenko Architectural Cavity Sliding Door System

- Our frames are available in standard heights & widths, for any project
- Recommended design, fully approved and tested. Quick and easy to install
- Quality quick release hanger system pre-drilled and cut to length
- Finished as Architrave, Square Set and P50 shadowline
- Quality components and construction
- Select grade timber frame & jambs
- Standard 90mm wall framing size
- Single piece extruded aluminium head-track ensures smooth and quiet operation
- Reinforced 4 wheel door hanger carriage system

Maximum
55kg
Door Weight

For custom made sizes please refer to our Classic Zero Clearance range